


P-9935Modbus Modbus Communication Card

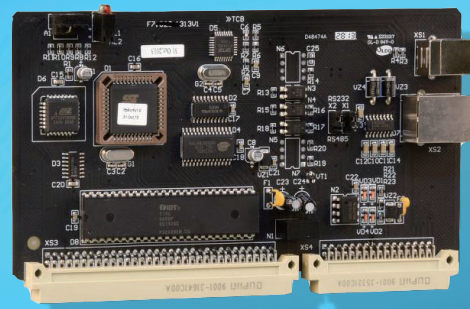

Description

For integrating fire alarm system to BMS, GST provide ModBus Interface Card P-9935ModBus for GST-IFP8 panel. Status of the fire alarm system will be converted and transferred to the memory of the interface card. The BMS system can simply read out the data and decode, to get all information required.

Features

- 4 types of statuses for each initialization device, Normal / Fire / Fault / Disable
- 4 types of statuses for each output device, Normal / Action / Fault / Disable
- Separate zone status transmission, Normal / Fire

Technical Specification

- Compatible Panel: GST-IFP8 panel
- Communication Protocol: RS232
- Baud Rate: 4800
- Parity Check: None
- Stop Bit: 1 bit
- 10 bits for each byte
- Device Capacity: 120758 (499X242)
- Zone Capacity: 999
- WEEE & RoHS compliant

Order Information

Part No.	P-9935Modbus
Device Name	Modbus Communication Card
Product No.	20101833