


P-9940A RS485 Class A Network Card

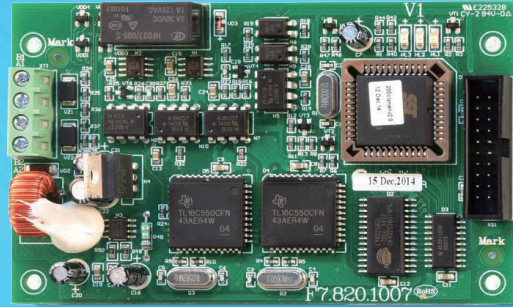

Description

P-9940A network card provides RS485 Class A network connection to GST200 series panels. All panels are connected in peer to peer topology. In case of cable break among the network, there is still redundancy communication route.


Order Information

Part No.	P-9940A
Device Name	RS485 Class A Network Card
Product No.	20100994


Technical Specification

- Compatible Panel: GST200-2 panel
GST200N panel
- Communication Protocol: RS485
- Baud Rate: 2400
- Cable Requirement: Minimum 1.0 mm² Fire Cable
- Communication Distance: 1200 meters
- Loop Connection: Class A

Typical Connection

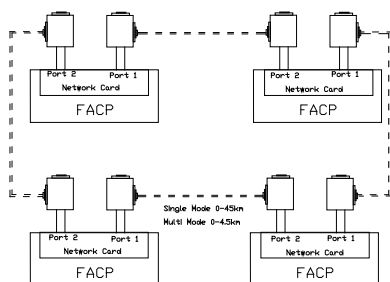

Fiber-Optic Class A network

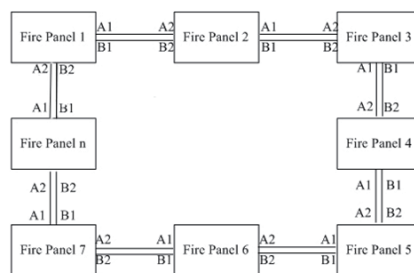

Standard Class A network

IMPORTANT: This publication is a generic version in which product information is shown for informational purposes only and does not constitute a specific commitment or guarantee. We are constantly pursuing the improvement of product technology to improve product performance, for which we reserve the right to adjust the configuration and technical information of the related products without notice. In addition, the description of system performance in this publication applies only to the usual situation. As a result, there may be a variety of unpredictable special circumstances in the real world, so the realization of the relevant product performance will depend on the professional investigation and analysis and the design plan. Please contact us and we will be happy to provide you with professional advice.