

Texecom

Designed to Perform

Texecom Limited


Bradwood Court, St. Crispin Way,
Haslingden, Great Britain BB4 4PW

Telephone (General) +44 (0)1706 234800

Facsimile (Sales) +44 (0)1706 223450

Email intsales@texe.com

Premier Elite COM 2400 with Speech Module (CGE-0006)

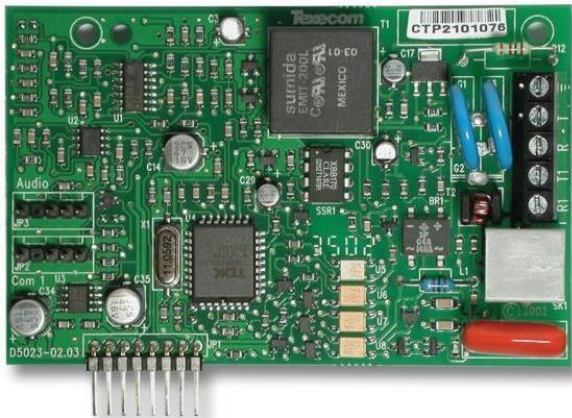

Features:

- ✓ PSTN based dialler with voice recording
- ✓ Compatible with Premier Elite control panels
- ✓ On board expansion port connectivity for speech module
- ✓ Four recordable 10 second audio messages
- ✓ Dialling up to 10 numbers
- ✓ EN 50131-1 and EN 50136-2-3 – Grade G3
- ✓ 4 different recordable messages for different events

Technical Specifications:

Speech Module:

- ✓ Supply Voltage: 9 – 16 VDC
- ✓ Current Consumption (Standby): 1mA
- ✓ Current Consumption (Active): 7mA
- ✓ Message Length: 10 Seconds each
- ✓ Messages/Channels: 4
- ✓ Dimensions: 52mm x 30mm x 10mm



Registered Office: Bradwood Court, St. Crispin Way, Haslingden, Lancs BB4 4PW.
Registered in England No. 2084170

Texecom

Designed to Perform

Texecom Limited

Bradwood Court, St. Crispin Way,
Haslingden, Great Britain BB4 4PW

Telephone (General) +44 (0)1706 234800

Facsimile (Sales) +44 (0)1706 223450

Email intsales@texe.com

Com2400:

- ✓ Operating Voltage: 9 - 13.7VDC
- ✓ Current Consumption:
 1. Quiescent: 25mA
 2. When Active: 80mA
- ✓ Dialling Formats: Pulse & DTMF
- ✓ Operating Temperature: -10°C (+14°F) to +55°C (+122°F)
- ✓ Storage Temperature: -20°C (-4°F) to +60°C (+140°F)
- ✓ Maximum Humidity: 95% non-condensing
- ✓ Dimensions (W x H x D): 95mm x 65mm x 25mm



Certificate Number: FM 35285

Registered Office: Bradwood Court, St. Crispin Way, Haslingden, Lancs BB4 4PW.
Registered in England No. 2084170