


P-9930Modbus

Modbus Communication Card

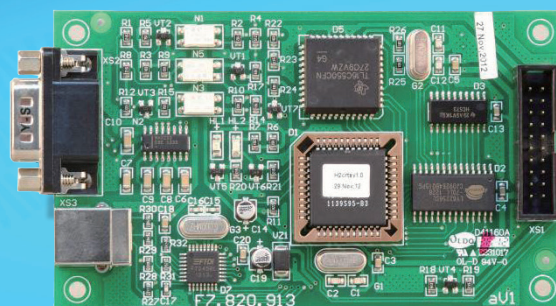

Description

For integrating fire alarm system to BMS, GST provide ModBus Interface Card P-9930ModBus for GST200-2 and GST200N panel. Status of the fire alarm system will be converted and transferred to the memory of the interface card. The BMS system can simply read out the data and decode, to get all information required.

Features

- 4 types of statuses for each initialization device, Normal / Fire / Fault / Disable
- 4 types of statuses for each output device, Normal / Action / Fault / Disable
- Separate zone status transmission, Normal / Fire

Technical Specification

- Compatible Panel: GST200-2 panel
GST200N panel
- Communication Protocol: RS232/ RS485
- Baud Rate: 4800bps
- Parity Check: None
- Stop Bit: 1 bit
- 10 bits for each byte
- Device Capacity: 120758 (499X242)
- Zone Capacity: 999

Order Information

Part No.	P-9930Modbus
Device Name	RS232 Communication Card
Product No.	20101830